

ORANGE Crush PiX 35LDX



OWNER'S MANUAL





THANK YOU!

Thank you for choosing Orange. You are now a member of the 'Legendary British Guitar Amplifier' owners club!

Since 1968 when the company was founded, Orange has been a pioneering force in the guitar amplification industry. Today, with a team of the world's finest amplifier engineers, Orange continues to push back the boundaries of conventional amplifier design.

Our commitment to craftsmanship and quality control has allowed our amplifiers to stand the test of time, giving their owners as much pleasure now, as the day they were bought. To maintain this level of excellence, each Orange amplifier is put through many rigorous test procedures before leaving the factory.

This booklet contains valuable technical and safety information. Please take the time to read this manual as the information may enhance the sound and performance of your amplifier. We are confident that you will be delighted with your new purchase and that it will provide you with many years of enjoyment.

CONTENTS

CONTACT DETAILS	4
IMPORTANT SAFETY INFORMATION.....	5
USING YOUR AMPLIFIER	9
FRONT PANEL FEATURES	10
REAR PANEL FEATURES.....	13
SPECIFICATIONS	14
FREE EXTENDED WARRANTY OFFER	15

The contents of this manual may be subject to change without notice. The latest version is available for download on the official Orange Amplification website:

<http://www.orangeamps.com/support/downloads/>



CONTACT DETAILS

Global Headquarters

Orange Amplification
OMEC House
108 Ripon Way
Borehamwood
Hertfordshire
WD6 2JA
ENGLAND

Tel: +44 20 8905 2828

Fax: +44 20 8905 2868

info@omec.com

Orange USA

2065 Peachtree Industrial Ct.
Suite 208
Atlanta, GA 30341
USA

Tel: 1-404-303-8196

Fax: 1-404-303-7176

info@orangeusa.com

IMPORTANT SAFETY INFORMATION



The lightning flash with arrowhead symbol, within an equilateral triangle, is intended to alert the user to the presence of un-insulated 'dangerous voltage' within the product's enclosure that may be of sufficient magnitude to constitute a risk of electric shock to persons. Terminals labelled as "Speaker Outputs" must be connected to a speaker cabinet of the designated load rating using an un-shielded two conductor cable for speaker use at all times during operation.



The exclamation point within an equilateral triangle and "WARNING" are intended to alert the user to the presence of important operating instructions. Failure to heed the instructions will result in severe injury or death.

- Read these instructions.
- Keep these instructions.
- Heed all warnings.
- Follow all instructions.
- Do not use this apparatus near water.


ORANGE Crush PiX 35LDX

- Clean only with dry cloth.
- Do not block any ventilation openings. Install in accordance with the manufacturer's instructions.
- Do not install near any heat sources such as radiators, heat registers, stoves, or other apparatus (including amplifiers) that produce heat.
- Do not defeat the safety purpose of the polarized or grounding-type plug. A polarized plug has two blades, one wider than the other. A grounding type plug has two blades and a third grounding prong. The wide blade or the third prong are provided for your safety. If the provided plug does not fit into your outlet, consult an electrician for replacement of the obsolete outlet.
- Unplug this apparatus during lightning storms or when unused for long periods of time.
- Servicing: Do not attempt to service this product yourself as opening or removing covers may expose you to dangerous voltage or other hazards.
- Refer all servicing to qualified service personnel.
- Damage Requiring Service: Unplug this product from the wall outlet and refer servicing to qualified service personnel under the following conditions: (a) When the power-supply cord or plug is damaged; (b) If liquid has been spilled, or objects have fallen into the product; (c) If the product has been exposed to rain or water; (d) If the product does not operate normally by following the operating instructions. Adjust only those controls that are covered by the operating instructions. Improper adjustment of other controls may result in damage and will often require extensive

ORANGE Crush PiX 35LDX

work by a qualified technician to restore the product to its normal operation; (e) if the product has been dropped or damaged in any way; (f) when the product exhibits a distinct change in performance - this indicates a need for service.

- Replacement Parts: When replacement parts are required, be sure the service technician has used replacement parts specified by the manufacturer or have the same characteristics as the original part. Unauthorised substitutions may result in fire, electric shock, or other hazards.



This Orange Amplifier conforms to UL Standard 60065 for Audio, Video and Similar Electronic Apparatus - Safety Requirements;

Certified to CAN/CSA-C22.2 No. 60065-03; IEC 60065 2001 + A1:2005--

This product complies with the WEEE Directive (2002/96/EC) marking requirement. This affixed product label indicates that you must not discard this electrical/electronic product in domestic household waste.

ORANGE Crush PiX 35LDX

This device complies with the Canadian Interference Regulations CAN ICES-3(B)/NMB-3(B).

This device complies with Part 15 of the FCC rules. Operation is subject to the following two conditions:

- 1) This device may not cause harmful interference.*
- 2) This device must accept any interference received, that may cause undesired operation.*

Note: *This equipment has been tested and found to comply with the limits for Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.*

However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try and correct the interference by one or more of the following measures.

- Reorient or relocate the receiving antenna.*
- Increase the separation between the equipment and receiver.*
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.*
- Consult the dealer or an experienced radio/TV technician for help.*



USING YOUR AMPLIFIER

IMPORTANT!

For countries or regions with a mains voltage of 115v or 120v, please switch the small, red mains selector to 115v or 120v and replace the fuse in the black pull out fuse tray, below the mains inlet, with the 120v version supplied.

For countries or regions with a mains voltage of 230v, please switch the small, red mains selector to 230v and replace the fuse in the black pull out fuse tray, below the mains inlet, with the 230v version supplied.


Fuses:

100V/120V - T2A

230V/240V - T1A



FRONT PANEL FEATURES

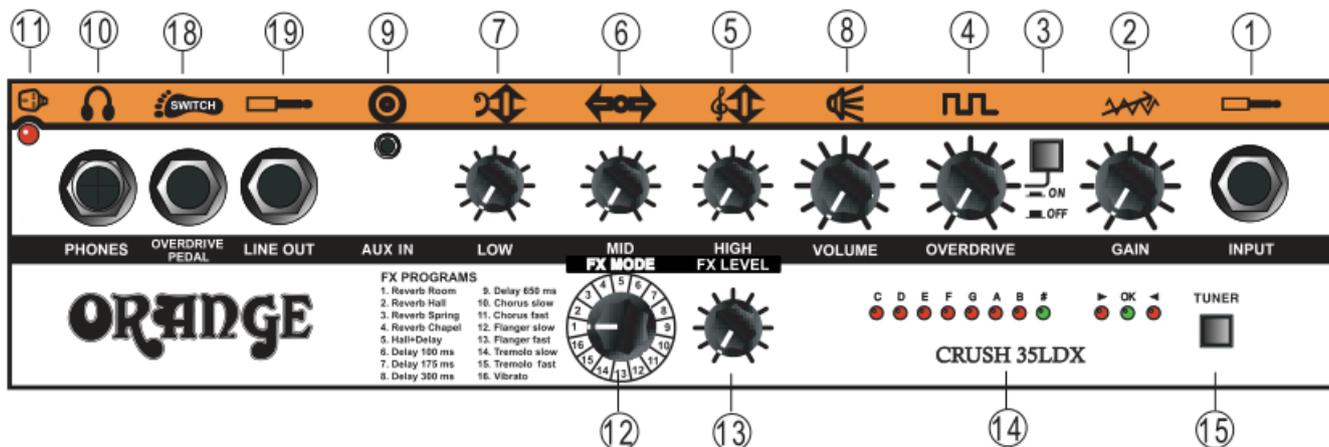

1. Input Jack Socket

Plug your instrument cable into this jack socket.

2. Gain Control

This controls pre-gain level.

3. Overdrive Switch

Use this switch to engage the Overdrive (switch depressed) or the Clean channel (switch in the out position).

4. Overdrive Level

This controls the amount of distortion, ranging from overdrive to high gain.

5. High

Provides high frequency equalization if required.

6. Mid

Provides middle frequency equalization with cut and boost.

7. Low

Provides low frequency equalization as required.

8. Volume

Controls the overall volume of the amplifier.

9. Aux In

Use this 1/8" stereo mini jack to connect the output from CD or MP3 player, laptop, etc., to the amp. The jacks are internally summed to a mono signal.

10. Phones

For use with most stereo headphones.

CAUTION: To avoid possible damage to your hearing, do not use headphones for extended periods of time at extremely loud levels.

11. Power Indicator

LED indicates whether the power switch is ON or OFF.

12. FX mode

Use this control select the type of FX applied to the output signal. Each effect and its location is indicated by the markings around the control.



13. FX Level

Use this control to set the amount of digital effect applied to the output signal.

14. Tuner LED

Play a note on your guitar. The appropriate red LED will illuminate on the display to indicate the note being played. If the green # LED also illuminates, this indicates a chromatic note, e.g. F Sharp (#).

The > arrow LED indicates the note is tuned flat (too low in pitch).

The < arrow LED indicates the note is tuned sharp (too high in pitch).

Adjust the string until the green **OK** LED between the two arrows is lit.

15. Tuner:

Depress this button to activate the tuner.

18. Overdrive Pedal Input


Use this jack to connect a latching footswitch to enable remote on/off switching of the overdrive.

19. Line Output

Use this unbalanced jack to send a line level signal to another amplifier, the mixing board, or recording console.



REAR PANEL FEATURES

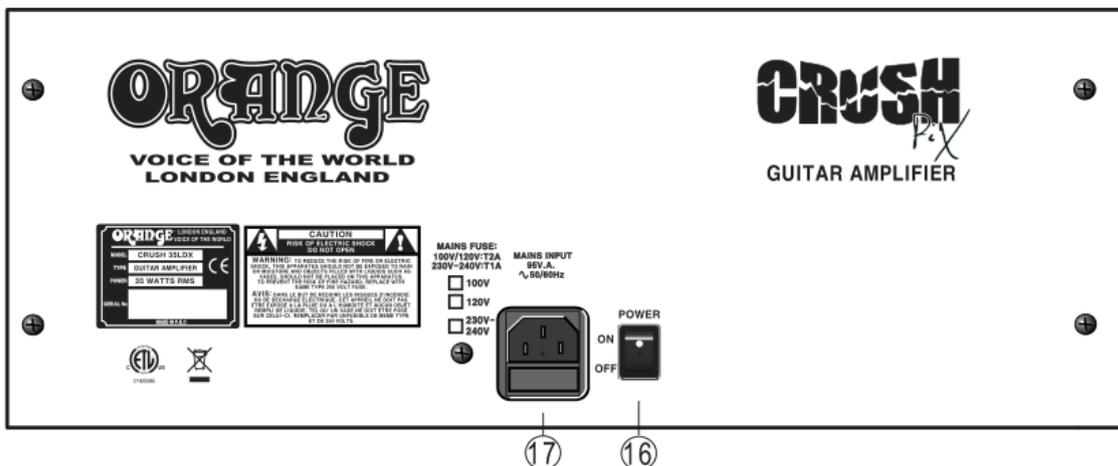

16. A/C Main Power Switch

This switch turns the AC MAIN power on/off

17. AC Inlet and Fuseholder

Connect the supplied standard 3-pin "IEC" plug here.

SPECIFICATIONS

OUTPUT POWER	SPEAKER	INPUT	INPUT SENSITIVITY	NOISE	DFX	FOOT S/W JACK & PUSH SWITCH
35 Watts RMS @ 1% THD, 4 ohm	1X 10"	Guitar and AUX	Normal 48mV F=1KHz, Volumes Tone Controls at Max	-25dB(Vol Max/M.Vol Max) -55dB(Vol Max/M.Vol Min) -30dB(Vol Max/M.Vol Min/Rev.Max)	16 programs	OverDrive Pedal Switch
HEADPHONE JACK LEVEL	POWER CONSUMPTION	POWER REQUIREMENT	DIMENSIONS (W)X(H)X(D)	WEIGHT	CABINET	COLOR & FINISH
350mV @ 35W (Headphone Impe. 8 ohm)	95VA	100V,120V,230V- 240V, 50/60Hz	10.9x14.5x8.9 inch 430x370x225 mm	25.3 lbs.(11.5kg)	Sturdy Particleboard	Orange Leatherette

Specifications may be subject to change without notice.



FREE EXTENDED WARRANTY OFFER

Orange amplifiers are under warranty for one year subject to consumer protection laws in the country of purchase and distributor's terms and conditions. An additional year can be added by registering online.

Valves and speakers supplied with an Orange amp or purchased separately at our online store are covered for 90 days from the date of purchase.

The warranty status of any Orange product is subject to its being used for its intended purpose in suitable conditions. As the manufacturer we reserve the right to refuse to warranty any Orange product which has been misused in any way whatsoever.

REGISTER RIGHT NOW AT www.orangeamps.com

